

# Macarthur Memorial Park

## Demolition and Construction Waste Management Plan

AUGUST 2017



**WASTE AUDIT AND  
CONSULTANCY SERVICES**

Level 21, 133 Castlereagh St  
Sydney NSW 2000

Telephone (02) 9199 4521

[www.wasteaudit.com.au](http://www.wasteaudit.com.au)



This report contains confidential information. It has been compiled by Waste Audit and Consultancy Services (Australia) Pty Ltd on behalf of the Catholic Metropolitan Cemeteries Trust for the Macarthur Memorial Park development.

This Waste Management Plan is not a substitute for legal advice on the relevant environmental legislation, which applies to the Catholic Metropolitan Cemeteries Trust, contractors or other bodies. Accordingly, Waste Audit and Consultancy Services (Australia) Pty Ltd will not be liable for any loss or damage that may arise out of this project, other than loss or damage caused as a direct result of Waste Audit and Consultancy Services (Australia) Pty Ltd.'s negligence.

# Table of contents

**Table of contents .....2**

**1. Background .....3**

**2. Waste Management Principles .....6**

    Waste sources ..... 7

        Stormwater Pollution Prevention ..... 8

        Litter Management ..... 8

    Records ..... 8

    Asbestos ..... 8

**3. Demolition Materials .....10**

**4. Hazardous Waste Materials .....14**

    Management Procedures..... 14

**5. Construction Materials.....15**

**6. Contracts and purchasing .....18**

**7. Training and Education.....19**


**Appendix A – Site Plan .....20**

# 1. Background

This Plan details the management of waste during the demolition and construction phases of Macarthur Memorial Park at 166- 176 St Andrews Road, Varroville, NSW.

It relates to Stage 1 of the development, which involves construction of memorial and funeral service facilities, as well as park management facilities and food premises, and the Stage 5 conservation of outbuildings that are planned to take place during Stage 1.

**Figure 1 – Site Staging Plan**

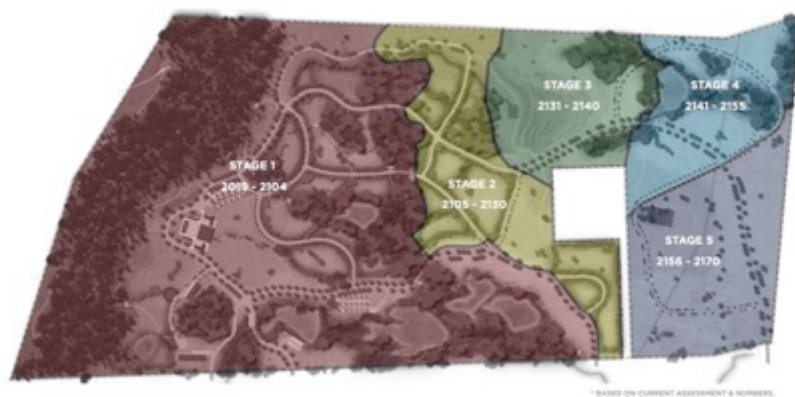

**Figure 2 – Site Location**



Below lists the main outbuildings to be demolished onsite, all of which are a part of the Stage 5 conservation works that will take place during Stage 1 of the development: cemetery buildings:

- Slab Hut
- Former Coach House
- Cottage

Note: as conservation works are to undertaken for this component of the development, demolition will primarily involve the removal and disposal of certain non-original and deteriorated and/or faulty materials and building components.

The main structures that will be constructed onsite include the following Stage 1 cemetery buildings, as well as the following Stage 5 conservation works:

- Chapel
- Café
- Function Room
- Gatehouse
- Administration Building
- Workshop
- Slab Hut
- Former Coach House
- Cottage

The aim of this Plan is to ensure that all waste resulting from demolition and construction activities from the civil works is managed in an effective, safe and environmentally aware manner. Specifically,

- To minimise the generation of waste to landfill
- To maximise waste material avoidance and reuse on site
- To ensure that where practicable, an efficient recycling procedure is applied to waste materials
- To raise awareness among employees and subcontractors of their waste management responsibilities

**Note:** *The testing and classification of any excavated material is not covered in this report. Where necessary separate specialist testing will be conducted by the project managers. If acid sulphate or contaminated soils are present on site, a separate management plan will need to be prepared for handling and disposal of such soil.*

This Plan has been developed with reference to the Campbelltown Council's Campbelltown (Sustainable City) Development Control Plan 2015 and relevant Sections of the *Protection of the Environment Operations Act 1997* and the NSW Environment Protection Authority *Waste Classification Guidelines, Part 1: Classifying Waste*, as well as consideration of industry best-practice for this type of development (demolition component).

In particular, it was required that there be compliance with *Australian Standard AS2601: The demolition of structures*. This in summary requires that the demolition of structures:

- sets out requirements for the planned demolition of buildings and certain other structures so that the risk of injury to workers, other site personnel and the public, and the risk of damage to adjacent property and the immediate environment is minimised;
- covers the methods and safety procedures applicable to demolition work in general as well as procedures for some types of structures;
- deals with manual and mechanical demolition techniques including those employing specialised earth-moving type machinery;
- includes informative appendices covering the demolition of pre-stressed concrete structures, some contractual considerations, a checklist for contractors and qualifications for site personnel;
- safety and health issues are addressed under the headings of:
  - Health and safety of the public - covering general requirements, lighting, falling materials, fencing, hoardings and warning notices, scaffolding, overhead protection for footpaths, and hazardous materials and conditions;
  - Safety and health of site personnel - covering general safety, personal protective clothing and equipment, cutting and welding, fire protection, first aid, amenities, removal of hazardous material and electrical safety;
  - Protection of adjoining buildings and protection of immediate environment - covering requirements relating to access and egress, damage and structural integrity, vibration and concussion, weatherproofing, burning, dust control, noise control, protection of public roads and protection of sewers and water courses; and
- protection of the site.

Adherence to AS2601 is required under the Environmental Planning and Assessment Regulation 2000.

Section 143 of the Protection of the Environment Operations Act 1997 requires waste to be transported to a place that can lawfully accept it. It will be the responsibility of the site developers to ensure all contractors clearly specify where all wastes are to be transported, the capacity of the nominated facilities to receive/manage the waste and to ensure that reports on management aspects (types, quantities and disposal pathways) are provided.

## 2. Waste Management Principles

The following waste hierarchy will be used as a guiding principle:



### Avoid and Reduce

Minimise the production of waste materials in the construction process by:

- Assessing and taking into consideration the resultant waste from different design and construction options
- Purchasing materials that will result in less waste, which have minimal packaging, are pre-cut or fabricated.
- Not over ordering products and materials

### Reuse

Ensure that wherever possible, materials are reused either on site or offsite.

- Identify all waste products that can be reused
- Put systems in place to separate and store reusable items
- Identify the potential applications for reuse both onsite and offsite and facilitate reuse



## Recycling

Identify all recyclable waste products to be produced on site.

- Provide systems for separating and stockpiling of recyclables
- Provide clear signage to ensure recyclable materials are separated
- Process the material for recycling either onsite or offsite

Note: In some cases it may be more economical to send the unsorted waste to specialised waste contractors who will separate and recycle materials at an offsite location.

## Disposal

Waste products which cannot be reused or recycled will be removed and disposed of. The following will need to be considered:

- Ensure the chosen waste disposal contractor complies with regulatory requirements
- Implement regular collection of bins

## Waste sources

The principles outlined above are applied to the expected waste sources for the development as follows:

### Excavation Material

Earthworks will be completed over the site as required to achieve proposed levels.

### Green Waste

It is expected that there will be green waste generated. All green waste material will remain onsite (shredded and or composted), and be reused in landscape areas around the development if possible.

### Bricks, Tiles, Concrete

Bricks will be stockpiled and reused wherever possible. Surplus, unused bricks will be reused in pavement construction or for temporary access tracks etc if possible. Unusable bricks will be collected and recycled at an appropriate brick/rubble recycling facility to be used in aggregate gravel products.

### Liquid Waste

Liquid waste may be produced on site for environmental control measures such as:

- Site and vehicle cleaning
- Dust control waste

The following measures will be taken to minimise the impact of liquid waste:

- Ensure water is used in moderation and no taps are left continuously running
- Use any grey water produced on site for irrigation or for dust suppression
- Only discharge clean water into storm water

### Stormwater Pollution Prevention

All actions will be undertaken to avoid pollution entering stormwater drains and for litter generation. The following will be initiated:

- i. Prior to commencement of any works a SWMS will be completed and reviewed to determine potential for stormwater pollution and/or litter generation
- ii. The proponent (contractor), will need to develop a management strategy to manage the potential for these issues to be realised
- iii. Site inspections will be conducted during the working day to monitor potential for stormwater generation and where identified, works will cease until appropriate controls are implemented
- iv. Waste water and storm water will be managed and disposed of in accordance with Sydney Water requirements.

### Litter Management

- i. Daily site inspections will be conducted to identify litter, remedy the situation and investigate the cause so as to reduce the potential for the issue to occur in the future.
- ii. Sufficient quantities of bins (and/or bin space), will be made available so as to avoid dumping of materials outside bins
- iii. All waste/recycling bins will have covers so as to ensure that wastes cannot be blown out during windy conditions. This will also apply to relevant stocks of materials to be used in construction.
- iv. Personnel will be allocated the role of litter management in that they will periodically inspect the site and surrounds for litter and if identified collect and dispose of it.

### Records

Records will be kept of all wastes and recyclables generated and either used on site, or transported off –site.

It will be a condition of appointment, that all waste/recycling contractors provide these records and that they also contain details of the facilities that the materials are transported to.

These records will be made available to Council on request.

### Asbestos

Based on a conservation works report completed for the Stage 5 area of the site, it is understood that existing sheet lining in the outbuildings contains asbestos in the form of asbestos cement.

Should any materials be suspected of being (or containing), asbestos, the following process will apply.

The process for managing what has initially been suspected of being or containing asbestos waste is as follows<sup>1</sup>:

- i. Treat the material as asbestos unless proven otherwise
- ii. Do not disturb the material (ie., shift or place into a container) at all
- iii. Seek advice from a suitably qualified laboratory to test the material(s) to determine if it is or is not asbestos.
- iv. If determined not to be asbestos, then it can be managed as an inert waste.
- v. If determined to be asbestos then managed by a licenced contractor for packaging, removal and disposal.
- vi. If the material has accidentally been uncovered, then the area should be cleared, barriers erected to prevent access, NSW WorkCover and EPA notified, and if broken, covered with a fine spray/mist of water.

**For what has been conclusively identified as asbestos containing materials (including soils), a specialist/licenced asbestos contractor will be used. As required, only workers trained in asbestos removal techniques will be allowed to manage the removal of asbestos contaminated soil and any contained on the buildings.**

In regards to disposal of asbestos containing materials, there are regulatory requirements under clause 42 of the Protection of the Environment Operations (Waste) Regulation 2005 that apply to the management of asbestos waste, including:

- Waste must be stored on the premises in an environmentally safe manner.
- Non-friable asbestos material must be securely packaged at all times.
- Friable asbestos material must be kept in a sealed container.
- Asbestos-contaminated soil must be wetted down.
- All asbestos waste must be transported in a covered, leak-proof vehicle.
- Asbestos waste must be disposed of at a landfill site that can lawfully receive this waste. Always contact the landfill beforehand to find out whether asbestos is accepted and any requirements for delivering asbestos to the landfill.
- It is illegal to dispose of asbestos waste in domestic garbage bins.
- It is also illegal to re-use, recycle or dump asbestos waste

---

<sup>1</sup> It may be that any material suspected of being asbestos is simply classified as such, and then managed accordingly.

### 3. Demolition Materials

The tables below detail the different waste streams expected in the demolition phase. The relevant disposal/recycling facilities have not been detailed as the waste contractor and sub-contractors have not yet been appointed for the project.

All waste contractors/sub-contractors will be required to detail all intended disposal facilities to ensure that legislative and safety requirements are met, the guiding principles of the waste hierarchy are upheld and maximum diversion from landfill is achieved.

Appendix A contains the site plan for the location and space allocated for waste materials, waste collection points and path access for collection vehicles. These locations may change as construction and demolition works progress.

The potential for reuse of materials on-site (and this will be encouraged for both demolition activities as well as considering what could be used for the construction phase of the development), will depend on the quality of the materials once demolition proceeds.

This Section details the “non-hazardous” wastes. The following Section outlines the management processes for hazardous wastes – this includes any asbestos that is currently contained on the houses and any other building.

As this Section relates to conservation works, volume estimations of materials may vary dependant on the findings and advice of the heritage architect who will be onsite to make assessment prior to, during, and after demolition works.

The following table details the estimated composition by m<sup>2</sup> of demolition waste to be generated and management strategy.

**Table 1: Waste management systems – demolition**

Materials on site			Destination	
Type of material	Estimated volume (m <sup>3</sup> )	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling facility)	Disposal (Detail contractor and landfill site)
Bricks	5m <sup>3</sup>	Bricks will be stockpiled and reused wherever possible. Surplus, unused bricks will be crushed onsite	Acceptable quality bricks collected by a contractor and sold for reuse. Unusable bricks will be collected and recycled	Facility TBA upon appointment of contractor <sup>2</sup>

<sup>2</sup> The actual site will be finalised once waste/recycling contractors have been appointed.

Materials on site		Destination		
Type of material	Estimated volume (m <sup>3</sup> )	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling facility)	Disposal (Detail contractor and landfill site)
		and then reused in pavement construction or for temporary access tracks etc if possible.	at an appropriate brick/rubble recycling facility to be used in aggregate gravel products	
Concrete (slab floor, pavings, cement-based render, old stormwater and sewer infrastructure)	15m <sup>3</sup>	Separated on site and crushed for use in pavement construction where possible	Collected by contractor and disposed at concrete recycling facility	Facility TBA upon appointment of contractor
Timber (framing, deteriorated roof shingles, hardboard linings & battens, hardboard lining sheets, doorset, frames and architrave, columns, wall linings)	20m <sup>3</sup>	Used for formwork and other construction activities	Recyclable timber (untreated) will be collected and recycled at appropriate timber yard. Unrecyclable (treated) timber will be disposed at landfill	Facility TBA upon appointment of contractor
Metals (chicken mesh, services cabinets, damaged roof cappings, metal cladding, conduits, security screen door)	15m <sup>3</sup>	No on-site reuse	Collected by specialist metal subcontractor for recycling	Facility TBA upon appointment of contractor
Plasterboard	5m <sup>3</sup>	Where possible, plasterboard waste should be stockpiled and crushed for reuse in landscaping on site	Material to be separated and stockpiled onsite. Collected by the waste subcontractor on a weekly basis (or as required) for recycling. Possible use as soil improver with gypsum etc removed by recycler	Facility TBA upon appointment of contractor

Materials on site		Destination		
Type of material	Estimated volume (m <sup>3</sup> )	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling facility)	Disposal (Detail contractor and landfill site)
Green waste (Low-lying vegetation, vine, organic matter)	5m <sup>3</sup>	All green waste material will remain onsite and be reused in landscape areas around the development.	Collected and disposed at green waste/mulching facility	No disposal to landfill
Glazing (includes solar panels)	5m <sup>3</sup>	No on-site reuse	Recyclers consulted as to potential for recycling and if suitable separated for recycling by a facility (possibly as road base, but generally not accepted for recycling due to film in the glass)	Facility TBA upon appointment of contractor
Excavation material (non-contaminated soil) <sup>3</sup>	40m <sup>3</sup>	Earthworks will be completed over the site as required. Any surplus material from the works will be used as fill material within the site, excavated material on site will be reused as fill material within the site.	Unused clean material will be collected and used as clean fill by waste contractor	Facility TBA upon appointment of contractor
Mixed Recyclables	4m <sup>3</sup>	No on-site reuse	Contractor appointed to collect and recycle	No disposal to landfill

---

<sup>3</sup> This refers to earthworks that may be required to be disposed of rather than used on-site. However, it is envisaged that there would be minimal need for this.

Materials on site		Destination		
Type of material	Estimated volume (m <sup>3</sup> )	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling facility)	Disposal (Detail contractor and landfill site)
General Waste (includes rubbish found in buildings)	8m <sup>3</sup>	No on-site reuse	No recycling or reuse	Facility TBA upon appointment of contractor

## 4. Hazardous Waste Materials

### Management Procedures

At this stage, it is not expected that there will be any hazardous materials that will require management under this Waste Management Plan.

Contractors employed to manage any identified hazardous wastes will be required (prior to appointment), to demonstrate their compliance with NSW EPA and WorkCover requirements for management of the specific materials they are contracted to manage.

The following are the recommended approaches for managing the wastes and other materials that were identified during the site analysis.

The key principles that need to be adhered to are<sup>4</sup>:

1. All hazardous wastes need to be correctly identified and managed in accord with all relevant legislation and Codes of Practices.
2. Hazardous materials need to be separated into their individual categories and not mixed with any other materials

Prior to commencing any demolition or clean-up activities, a Workplace Health & Safety Plan will be developed, implemented and monitored with all relevant site personnel receiving specific training in management of hazardous waste materials (including suspected hazardous materials).

---

<sup>4</sup> Reference should be made to the NSW EPA publication, Waste Classification Guidelines Part 1: Classifying Waste.



## 5. Construction Materials

This plan refers to the Stage 1 construction of new buildings, and Stage 5 conservation works of the Macarthur Memorial Park development.

The following summarises the types, quantities and management systems for construction materials that may be generated during the civil works activities.

The quantity of waste materials to be generated onsite are estimates and therefore the systems that will be put in place need to incorporate flexibility to allow for variation in the total quantities generated. Active site management during the construction phase will ensure all waste/recyclable materials are disposed of appropriately and that all waste receptacles are of sufficient capacity to manage onsite activities.

Table 3 below details the estimated composition by m<sup>3</sup> of construction waste to be generated for the total site.

Finalisation of the system(s) that will be implemented for the recovery of materials and for disposal of others to landfill will occur following appointment of contractor(s). A component of the appointment will be that contractors will be required to provide data as to the disposal pathway (eg., materials, volumes and final disposal site), as well as a validation process for this information.

The appointed contractor(s) will also be responsible for sourcing speciality recycling facilities for the materials that cannot be reused on site.

**Table 3: Waste management systems – construction**

Materials on site			Destination	
Type of material	Estimated volume (m <sup>3</sup> )	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling contractor)	Disposal (Detail contractor and landfill site)
Concrete (roadworks, paving etc.)	15m <sup>3</sup>	Separated on site and crushed for use in pavement construction where possible	Collected by contractor and disposed at concrete recycling facility	Facility TBA upon appointment of contractor

Materials on site			Destination	
Type of material	Estimated volume (m <sup>3</sup> )	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling contractor)	Disposal (Detail contractor and landfill site)
Timber (formwork, battens)	15m <sup>3</sup>	Separated and where feasible, reused for further formwork	Unused material separate and stockpiled onsite. Collected by specialist timber subcontractor for recycling	Facility TBA upon appointment of contractor
Ferrous Metals (eg., fencing, substation equipment waste, steel fixings, steel roofing, steel cappings, steel gutters, )	10m <sup>3</sup>	No on-site reuse	Collected by specialist metal subcontractor for recycling	Facility TBA upon appointment of contractor
Non-Ferrous Metals (eg., wiring/cables)	2m <sup>3</sup>	No on-site reuse	Collected by specialist metal subcontractor for recycling	Facility TBA upon appointment of contractor
Soil/Sand/Gravel	5m <sup>3</sup>	Will be stockpiled for reuse.	Excavation materials will be collected and used as clean fill by the waste contractor with appropriate notification as to location	All remaining material will be disposed at landfill – facility (or other sites as fill), TBA upon appointment of contractor
Mixed Recyclables	7m <sup>3</sup>	No on-site reuse	Contractor appointed to collect and recycle	No disposal to landfill

Materials on site		Destination		
Type of material	Estimated volume (m <sup>3</sup> )	On-site (Reuse or recycle)	Off-site (Detail contractor and recycling contractor)	Disposal (Detail contractor and landfill site)
General waste	10m <sup>3</sup>	No on-site reuse	No recycling or reuse	Facility TBA upon appointment of contractor

## 6. Contracts and purchasing

Each subcontractor working on the site will be required to adhere to this Waste Management Plan.

The Head Contractor will ensure each subcontractor:

- Takes practical measures to prevent waste being generated from their work
- Implements procedures to ensure waste resulting from their work will be actively managed and where possible recycled, as part of the overall site recycling strategy or separately as appropriate
- Ensures that the right quantities of materials are ordered, minimally packaged and where practical pre-fabricated. Any oversupplied materials are returned to the supplier
- Implements source separation of off cuts to facilitate reuse, resale or recycling.

The Site Manager will be responsible for:

- Ensuring there is a secure location for on-site storage of materials to be reused on site, and for separated materials for recycling off site.
- Engaging appropriate waste and recycling contractors to remove waste and recycling materials from the site
- Co-coordinating between subcontractors, to maximise on site reuse of materials
- Monitoring of bins on a regular basis by site supervisors to detect any contamination or leakage
- Ensuring the site has clear signs directing staff to the appropriate location for recycling and stockpiling station/s. And that each bin/skip/stockpile is clearly sign posted
- Providing training to all site employees and subcontractors in regards to the WMP as detailed in section 7 below.

Should a subcontractor cause a bin to be significantly contaminated, the Site Manager will be advised by a non-conformance report procedure. The offending subcontractor will then be required to take corrective action, at their own cost. The non-conformance process would be managed by the Head Contractors' Quality Management Systems

## 7. Training and Education

All site employees and sub-contractors will be required to attend a site specific induction that will outline the components of the WMP and explain the site specific practicalities of the waste reduction and recycling strategies outlined in the WMP.

All employees are to have a clear understanding of which products are being reused/recycled on site and where they are stockpiled. They are also to be made aware of waste reduction efforts in regards to packaging.

The site manager will post educational signage in relation the recycling activities on site in breakout areas, lunch rooms etc.

## Appendix A – Site Plan

### Outbuildings



### Stage 1 Memorial Park Buildings



Entry to Site via  
St Andrews Rd



= Approximate Location of New Buildings



= Location of Centralised Temporary Waste Storage Area



= Location of Temporary Waste Storage Area for Outlying Function Room



= Road/Path to Service Waste